


Permanent magnets

Ideally suited for ejector systems on core boxes and pattern-making facilities due to high tensile load up to 18 kg.

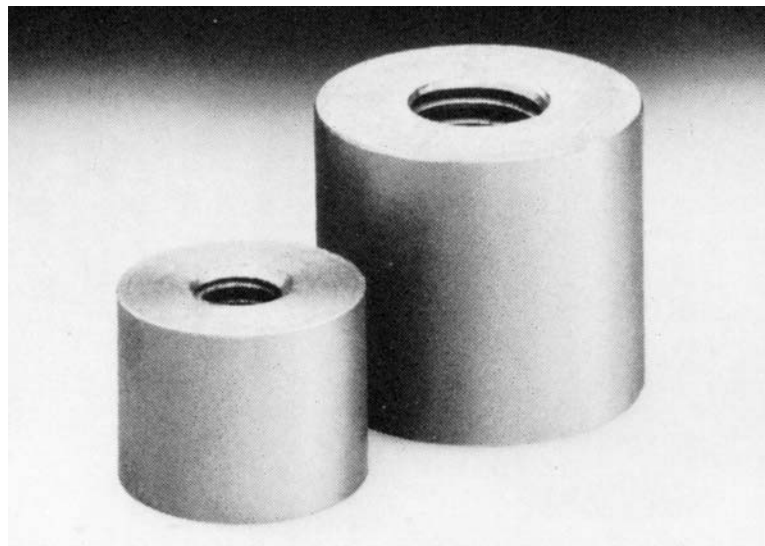

Part No.	Diameter [inch]	Length [inch]	Inside thread* [inch]	Tensile load [kg]
GS-45818	1	$\frac{3}{4}$	$\frac{3}{8}$	5
GS-45831-1	1	$\frac{1}{2}$	$\frac{1}{4}$	5
GS-45831-2	1	$\frac{3}{4}$	$\frac{1}{4}$	5
GS-60128-1	$1\text{-}\frac{3}{8}$	$1\text{-}\frac{3}{16}$	$\frac{1}{2}$	18
GS-60128-2	$1\text{-}\frac{3}{8}$	$1\text{-}\frac{3}{16}$	$\frac{5}{8}$	18
GS-60128-3	$1\text{-}\frac{3}{8}$	$1\text{-}\frac{3}{16}$	$\frac{3}{8}$	18

*Magnets can also be supplied with metric inside thread.